











Specifications

	Voltage (V)	100-240V ac
Hz	Frecuency (Hz)	50-60
Φ	Power factor (Cos fi)	>0,9
	Dimming	No/Non/Não
	IP Tightness index	20
K	Colour temperature	3.000K
	CRI Colour rendering index	>80
	Opening angle	180°
	Measures	118x186
	Operating temperature	-10°C~+35 °C
Φ_{LUM}	Flux (lm)	4.511lm
	Lifetime	(L70B50>) 25.000h




References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
521321	28W	>0,9	3.410lm	3.000K	100x160
521338	28W	>0,9	3.560lm	4.000K	100x160
521345	28W	>0,9	3.715lm	6.500K	100x160
521352	37,5W	>0,9	4.511lm	3.000K	118x186
521369	37,5W	>0,9	4.620lm	4.000K	118x186
521376	37,5W	>0,9	4.732lm	6.500K	118x186

Dimensions

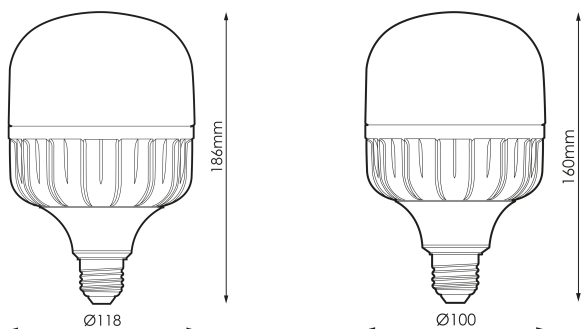

Photometry



Info



The working ambient temperature can not exceed 50°C in any case, therefore, it is not advisable to use these bulbs in closed luminaires where these temperatures can be overcome, since the useful life of the product can be significantly reduced. Lack of ventilation or sufficient air volume raises the temperature above the limits of product use.