











## Specifications

	<b>Voltage (V)</b>	220-240V ac
Hz	<b>Frecuency (Hz)</b>	50-60
$\Phi$	<b>Power factor (Cos fi)</b>	>0,9
	<b>Dimming</b>	No/Non/Não
	<b>IP Tightness index</b>	64
K	<b>Colour temperature</b>	6.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	330°
	<b>Measures</b>	90x266
	<b>Operating temperature</b>	-10°C~+35 °C
$\Phi_{LUM}$	<b>Flux (lm)</b>	7.021lm
	<b>Lifetime</b>	(L70B50>) 50.000h




## References



	W	$\phi$	$\phi_{LUM}$	K	$\leftrightarrow$
<b>521383</b>	27W	>0,9	3.333lm	3.000K	70x206
<b>521390</b>	27W	>0,9	3.480lm	4.000K	70x206
<b>521406</b>	27W	>0,9	3.607lm	6.500K	70x206
<b>521413</b>	36W	>0,9	4.492lm	3.000K	90x235
<b>521420</b>	36W	>0,9	4.527lm	4.000K	90x235
<b>521437</b>	36W	>0,9	4.683lm	6.500K	90x235
<b>521444</b>	45W	>0,9	5.852lm	3.000K	90x251
<b>521451</b>	45W	>0,9	5.948lm	4.000K	90x251
<b>521468</b>	45W	>0,9	6.089lm	6.500K	90x251
<b>521475</b>	54W	>0,9	6.975lm	3.000K	90x266
<b>521482</b>	54W	>0,9	6.812lm	4.000K	90x266
<b>521499</b>	54W	>0,9	7.021lm	6.500K	90x266

## Dimensions

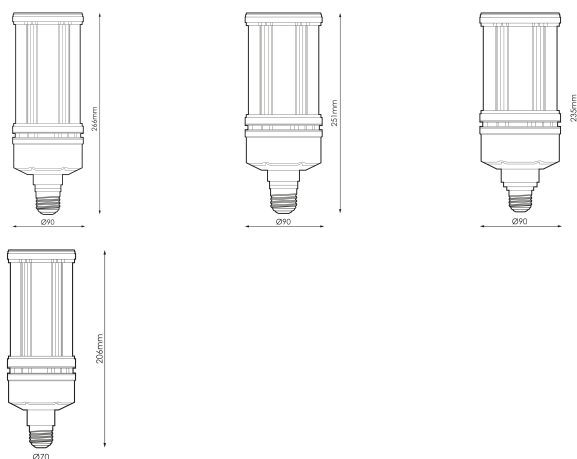

## Photometry



### Info



The working ambient temperature can not exceed 50°C in any case, therefore, it is not advisable to use these bulbs in closed luminaires where these temperatures can be overcome, since the useful life of the product can be significantly reduced. Lack of ventilation or sufficient air volume raises the temperature above the limits of product use.