













Specifications (Series luminaires)

	Electrical isolation	CIII
	Voltage (V)	V
	Frecuency (Hz)	Hz
	Dimming	No
	IP Tightness index	IP65
	Body	AL
K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	Measures	211,3x313,9x37,4mm
	Flux (lm)	1.047lm
	Lifetime	(L70B50>) 25.000h




References




	W	ϕ_{LUM}	K			
590693	10W	1.047lm	3.000K	>80	(L70B50>) 25.000h	211,3x313,9x37,4mm
590709	10W	1.114lm	4.000K	>80	(L70B50>) 25.000h	211,3x313,9x37,4mm

Dimensions



Photometry

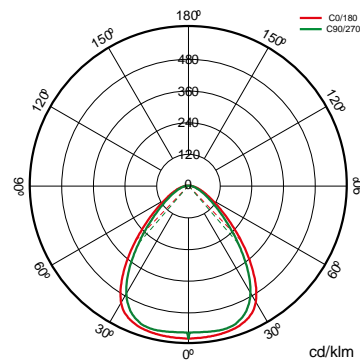



Info



Replaceable battery