


















**MADE IN SPAIN**  
Desing by PRILUX



## Specifications

	Voltage (V)	220-240V ac	
Hz	Frecuency (Hz)	50-60Hz	
	Current (mA)	Until 800mA	
$\Phi$	Power factor	Until 0,98	
	Electrical isolation	CI	
	Sealing rating	IP66	
	Impact resistance	IK10	
	Operating temperature	Until +45°C	
$\Phi$	Flujo luminoso (lm)	Until 16.977lm	
K	Colour temperature	4.000/5.000K	
	Colour rendering index	>80	
	Lifetime/	L70 B10>140.000h L90 B10>40.000h	
	Colour	Light grey	
	Diffuser	PC-O: Opal Polycarbonate	
	Body	PC: Polycarbonate	
	Mounting position	Surface	
	Model	 Measures	 Weight
	1X-600mm	655 x 82 x 87mm	1,2Kg
	1X-1200mm	1.265 x 82 x 87mm	1,8Kg
	1X-1500mm	1.565 x 82 x 87mm	2,2Kg
	2X-1500mm	1.565 x 121x 87mm	2,7Kg


[GRÁFICOS: Unidades en mm/ GRAPHICS: Units in mm/ GRAPHIQUES: Unités en mm/GRÁFICOS: Unidades en mm]




## References

	$W_{LED}$	$W_T$		$\phi$	$\phi_{LED (T_1=25^\circ C)}$	$\phi_{LED}$	$\phi_T$	$\phi/W$		K	$\leftrightarrow$	
<b>524896</b>	1 x 16W	20,1W	500mA	0,92	3.295lm	3.128lm	2.674lm	133lm/W	72	4.000K	655 x 82 x 87mm - 1x	-20°C~+35 °C
<b>525114</b>	1 x 16W	20,1W	500mA	0,92	3.338lm	3.169lm	2.709lm	135lm/W	72	5.000K	655 x 82 x 87mm - 1x	-20°C~+35 °C
<b>524926</b>	1 x 19W	22,3W	300mA	0,91	4.006lm	3.816lm	3.244lm	145lm/W	144	4.000K	1.265 x 82 x 87mm - 1x	--20°C~+45 °C
<b>525121</b>	1 x 19W	22,3W	300mA	0,91	4.058lm	3.866lm	3.287m	147lm/W	144	5.000K	1.265 x 82 x 87mm - 1x	--20°C~+45 °C
<b>524933</b>	1 x 32W	37,2W	500mA	0,92	6.517lm	6.095lm	5.181lm	139lm/W	144	4.000K	1.265 x 82 x 87mm - 1x	-20°C~+35 °C
<b>525138</b>	1 x 32W	37,2W	500mA	0,92	6.600lm	6.173lm	5.247lm	141lm/W	144	5.000K	1.265 x 82 x 87mm - 1x	-20°C~+35 °C
<b>524940</b>	1 x 45W	51,5W	700mA	0,96	8.905lm	8.234m	7.069lm	137lm/W	144	4.000K	1.265 x 82 x 87mm - 1x	-20°C~+35 °C
<b>525145</b>	1 x 45W	51,5W	700mA	0,96	9.019m	8.339lm	7.159m	139lm/W	144	5.000K	1.265 x 82 x 87mm - 1x	-20°C~+35 °C
<b>524957</b>	1 x 32W	36,7W	400mA	0,92	6.548lm	6.333lm	5.383lm	147lm/W	180	4.000K	1.565 x 82 x 87mm - 1x	-20°C~+35 °C
<b>525152</b>	1 x 32W	36,7W	400mA	0,92	6.632lm	6.414lm	5.452lm	149lm/W	180	5.000K	1.565 x 82 x 87mm - 1x	-20°C~+35 °C
<b>524971</b>	1 x 45W	50,4W	550mA	0,95	8.975lm	8.386m	7.128lm	141lm/W	180	4.000K	1.565 x 82 x 87mm - 1x	-20°C~+35 °C
<b>525169</b>	1 x 45W	50,4W	550mA	0,95	9.090lm	8.493m	7.219lm	143lm/W	180	5.000K	1.565 x 82 x 87mm - 1x	-20°C~+35 °C
<b>524988</b>	1 x 65W	73,1W	800mA	0,96	12.659lm	11.621lm	9.884lm	135lm/W	180	4.000K	1.565 x 82 x 87mm - 1x	--20°C~+45 °C
<b>525176</b>	1 x 65W	73,1W	800mA	0,96	12.856lm	11.802lm	10.038lm	137lm/W	180	5.000K	1.565 x 82 x 87mm - 1x	--20°C~+45 °C
<b>525053</b>	2 x 24W	51,0W	300mA	0,95	10.016lm	9.223lm	7.655lm	150lm/W	360	4.000K	1.565 x 121 x 87mm - 2x	--20°C~+45 °C
<b>525244</b>	2 x 24W	51,0W	300mA	0,95	10.144lm	9.341lm	7.753Lm	152lm/W	360	5.000K	1.565 x 121 x 87mm - 2x	--20°C~+45 °C
<b>525060</b>	2 x 41W	85,2W	500mA	0,98	16.291lm	14.873lm	12.270lm	144lm/W	360	4.000K	1.565 x 121 x 87mm - 2x	-20°C~+35 °C
<b>525251</b>	2 x 41W	85,2W	500mA	0,98	16.500lm	15.064lm	12.428lm	146lm/W	360	5.000K	1.565 x 121 x 87mm - 2x	-20°C~+35 °C
<b>525077</b>	2 x 53W	114,3W	650mA	0,98	21.093lm	18.973lm	15.748m	138lm/W	360	4.000K	1.565 x 121 x 87mm - 2x	--20°C~+45 °C
<b>525268</b>	2 x 53W	114,3W	650mA	0,98	21.364lm	19.217lm	15.951lm	140lm/W	360	5.000K	1.565 x 121 x 87mm - 2x	--20°C~+45 °C
<b>524995</b>	2 x 57W	123,4W	700mA	0,98	22.262lm	20.207lm	16.761lm	136lm/W	360	4.000K	1.565 x 121 x 87mm - 2x	-20°C~+35 °C
<b>525008</b>	2 x 57W	123,4W	700mA	0,98	22.548lm	20.467lm	16.977lm	138lm/W	360	5.000K	1.565 x 121 x 87mm - 2x	-20°C~+35 °C

## Measures

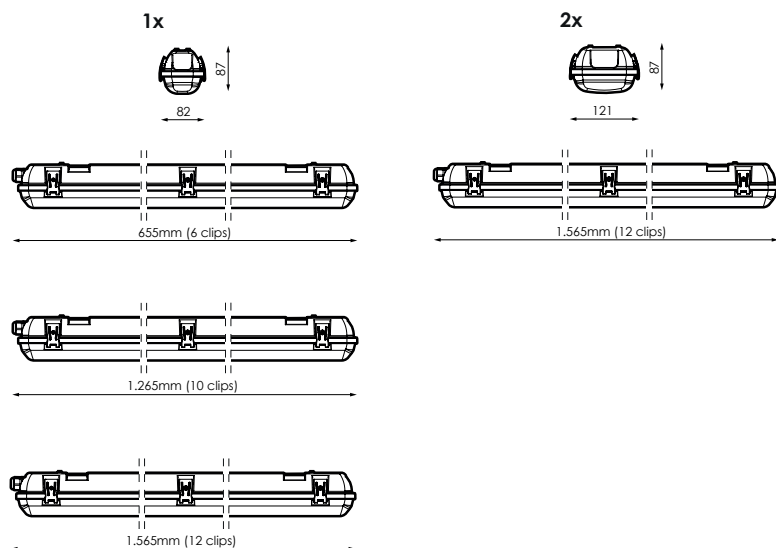


## Photometry



1X

655 x 82 x 87mm  
1.265 x 82 x 87mm  
1.565 x 82 x 87mm

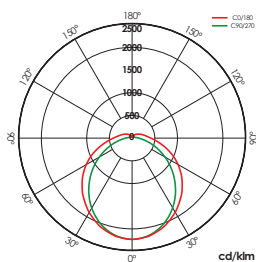

2X

1.565 x 121 x 87mm

## On request

### Colour temperature

Ra>80  
3.000K  
6.500K

### Dimming

 °C~+45 °C

### Operating temperature

-20°C~+45 °C

### Configuración

emergency kit 3h  
Operating temperature -5°C~+35 °C

### Sensor

Sensor ON-OFF (presencia)

### Through-wiring

9A máx. (3x1,5mm<sup>2</sup>)

W <sub>LED</sub>	Measures	-20°C~+45 °C	Emergencia kit 3h.	Sensor ON-OFF
1 x 16W	655 x 82 x 87mm-1X	●		
1 x 19W	1.265 x 82 x 87mm - 1x		●	●
1 x 32W	1.265 x 82 x 87mm - 1x	●	●	●
1 x 45W	1.265 x 82 x 87mm - 1x	●	●	●
1 x 32W	1.565 x 82 x 87mm - 1x	●	●	●
1 x 45W	1.565 x 82 x 87mm - 1x	●	●	●
1 x 65W	1.565 x 82 x 87mm - 1x			●
2 x 24W	1.565x 121 x 87mm - 2x		●	●
2 x 41W	1.565x 121 x 87mm - 2x	●		●
2 x 53W	1.565x 121 x 87mm - 2x			●
2 x 57W	1.565x 121 x 87mm - 2x			●